

Cabinet Solutions

Open Frame Racks

Open Frame & Rack

Global SIX

● 45U 513 X 420mm Open Frame

Features:

- Exquisite design with precise craftsmanship
- Welded steel frame for front and back part, can be flat packed, easier to transport

Specifications

Width:	19" 513mm
Heights:	45U
Depths:	420mm
Standard:	Comply with ANS/EIA PS-310-D, IEC297-2, DIN41497, PART1, DIN41494, PART7, ETSI Standard
Material:	SPCC quality cold rolled steel Thickness: 2.0mm
Loading Capacity:	Static Loading 500kg
Rating:	IP20
Surface Finish:	Degreasing, Pickling, Phosphoric Powder Coated

● 45U 161 X 318mm Cable Manager

Features:

- Exquisite design with precise craftsmanship
- Easy to install.


Standard:	Comply with ANS/EIA PS-310-D, IEC297-2, DIN41497, PART1, DIN41494, PART7, ETSI Standard
Material:	SPCC quality cold rolled steel Plastic finger: PC material Thickness: 1.2mm
Surface Finish:	Degreasing, Pickling, Phosphoric Powder Coated

● 45U 321 X 318mm Cable Manager

Features:

- Exquisite design with precise craftsmanship
- Easy to install.

Standard:	Comply with ANS/EIA PS-310-D, IEC297-2, DIN41497, PART1, DIN41494, PART7, ETSI Standard
Material:	SPCC quality cold rolled steel Plastic finger: PC material Thickness: 1.2mm
Surface Finish:	Degreasing, Pickling, Phosphoric Powder Coated

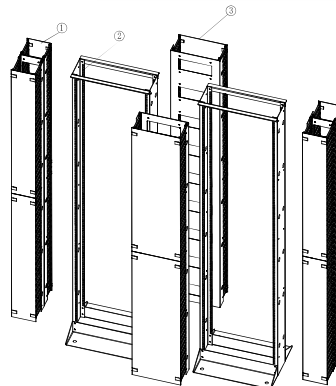

1. 161*318*45U Cable Management
2. 513*420*45U frame
3. 321*318*45U Cable Management

Part Number

G6-OFR-45	45U Open Frame Rack
G6-VCMB-45	Vertical Cable Manager 150mm
G6-VCMB300-45	Vertical Cable Manager 300mm