

# Trolley Charging Solution

## Charging Locker

## Charging Locker

Global **SIX**



### Features

- Single lockable slim door with 3-point locking mechanism
- Optional other locks
- 20 fixed shelves
- Power Distribution: 1 x 3-point and 1 x schuko white socket per bay, 220 volt AC
- 1 pcs 2P circuit breaker
- Adjustable feet and castors are available simultaneously
- Efficient baying and earthing kit of cabinet
- Assembled weight of charging locker: 145kg
- Thickness: frame 2.0mm, door 1.6mm

### Specification

<b>Standard:</b>	Comply with ANS/EIA RS-310-D, IEC297-2, DIN41491 PART 1, DIN41491 PART 7, ETSI
<b>Material:</b>	SPCC cold rolled steel
<b>Loading Capacity:</b>	Static loading 300kg (on the adjustable feet)
<b>Rating:</b>	IP20
<b>Surface Finish:</b>	Degreasing, Pickling, Phosphoric, Powder Coating
<b>Packaging:</b>	Flat Packed or Assembled

### Size

<b>Width:</b>	605mm
<b>Heights:</b>	2015mm
<b>Depths:</b>	400mm

### Part Numbers

G6-CL-20S/220




605x400x2015 20-Bay Shared Charging Locker



# Trolley Charging Solution

## Charging Locker

### Charging Locker

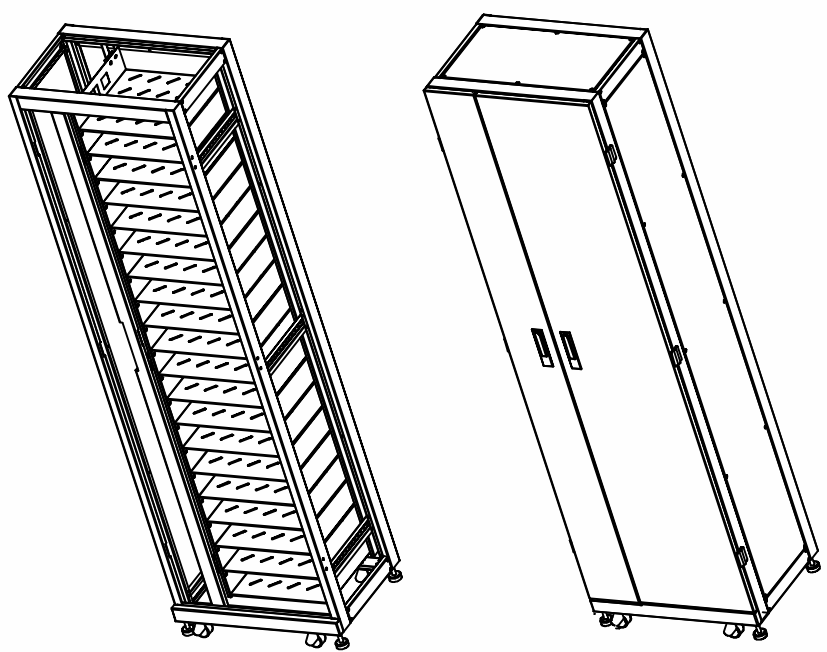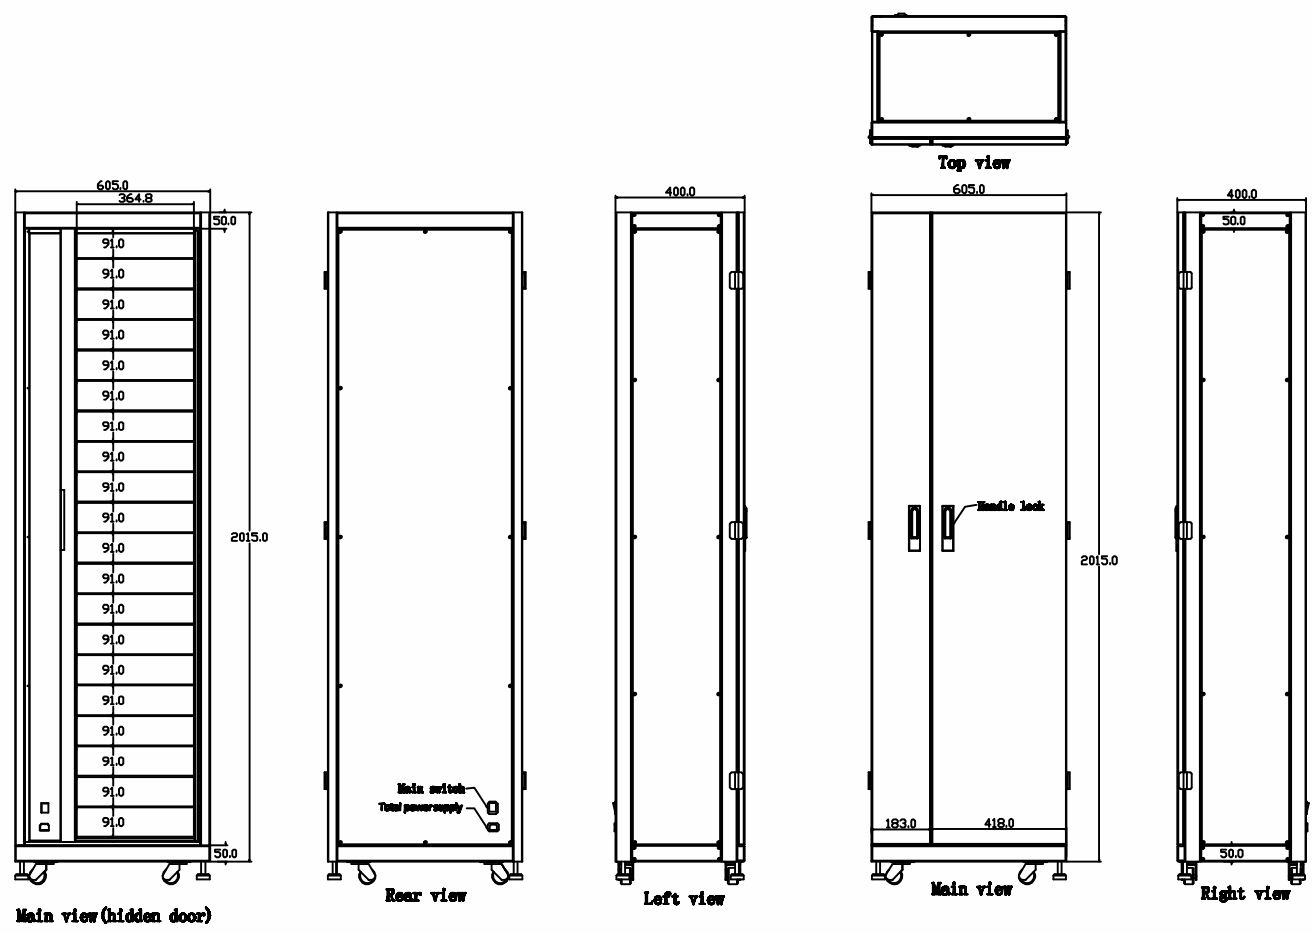

#### Part Numbers

G6-CL-20S/220

605x400x2015 20-Bay Shared Charging Locker