

Copper Structured Cabling Solutions

Cat5e UTP Keystone

Cat5e UTP Keystone Jack

Global **SIX**



Electrical Characteristics

- Current Rating » 1.5 Amps
- DC Resistance » 0.1m Ω maximum
- Contact Resistance » 20m Ω maximum
- Voltage Rating » 150 V

Technical Characteristics

- Storage » -40°C to 70°C
- Operation » -10°C to 60°C
- Relative Humidity » Maximum non-condensing 93%
- Total Contact Force » 800 grams
- Retention » 50N
- Insertion/Extraction » 750 cycles minimum
- IDC Wire Gauge » 22-26 AWG

Standard

- TIA/EIA-568-C-2
- ISO/IEC 11801: 2011 (Ed.2.2) Class D
- CENELEC EN 50173 -1- 2011
- FCC Part 68
- IEC 60603 - 7- 2

Packaging


- Individually packed jacks with termination instructions
- 25 pieces per box

Specifications

Housing High Temperature, PC plastic

Jack Contacts » Phosphor Bronze plated with 50 micro- Inch of gold over 100 micro-inch of nickel

IDC Contact » Phosphor Bronze with 100 micro-inch Tin

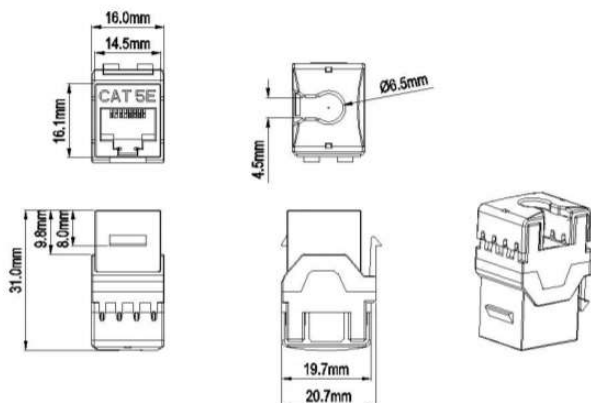

Part Number

G6JA-C5E-UTP-BK

Cat5e UTP Keystone Black